



North American Headquarters  
 601 Rayovac Drive  
 Madison, WI 53711  
 Telephone 1-800-331-4522  
 Internet [www.rayovac.com](http://www.rayovac.com)

Marketing Data Sheet - Batteries

S6600206  
 Issue J  
 Memo No: [MDSR0104](#)

Rayovac Stock Number: **810**

Name: **810 ALKALINE**

**ENGINEERING DATA:**

**Cell Chemistry:** Alkaline

**Designation:** ANSI/NEDA – 910A, IEC LR1

**Nominal Voltage:** 1.5 volts

**Approximate Weight:** .34 Oz (9.6 grams)


**Approximate Volume:** .18 CU IN (2.9 CU CM)

**Operating Temp. Range:** -30° C to 55° C (-20° F to 130° F)

**Terminals:** Flashlight

**Shell:** Plastic

**Environmental:** Meets Environmental Protection Agency (EPA) requirements For Landfill Disposal.  
 no Mercury Added Formulation  
[Rayovac Material Safety Sheets](#)

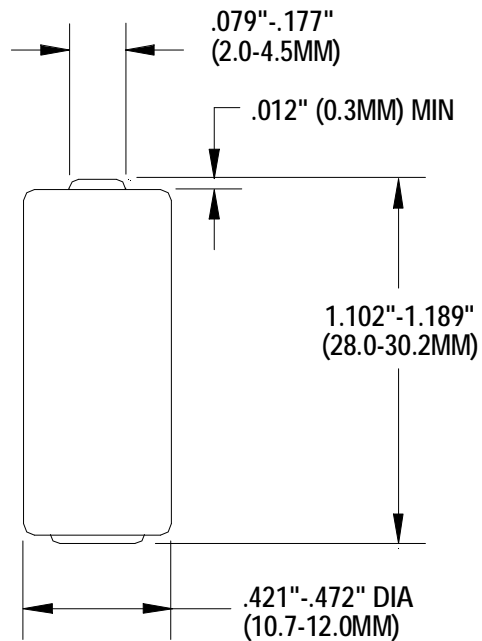

Dimensions shown are  
 ANSI / IEC standards

**TYPICAL INITIAL SERVICE AT 70°F (HOURS)  
CUTOFF VOLTAGE**

APPLICATION DUTY CYCLE	LOAD (OHMS)	CURRENT (MA at 1.2V)	CUTOFF VOLTAGE			
			1.2V	1.1V	1.0V	0.9V
5 MIN/DAY	5.1	235	.2	.5	1.3	2.3
16 HR/DAY	300	4	130	160	180	200

**This data is subject to change. Performance information is typical. Contents herein do not constitute a warranty.**