


Rayovac Stock Number: **CR2**

Document Number: **S6600159** Rev.: **F**

Dimensions:
(ANSI / IEC Standards)

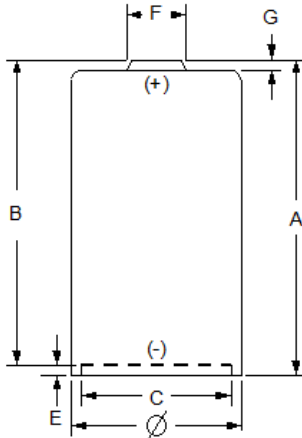

Dimension	Millimeters	Inches
A (Max)	27	1.063
B (Min)	25.8	1.015
C (Min)	8.5	0.335
E (Max)	0.5	0.02
E (Min)	0.05	0.002
F (Max)	6.5	0.256
G (Min)	0.7	0.027
∅ (Max)	15.6	0.614
∅ (Min)	15.1	0.594

Engineering Data:

Cell Chemistry:	Lithium/Manganese Dioxide (CR)	Approximate Volume:	5.16 CU CM
Designation:	ANSI/NEDA-5046LC, IEC-CR2	Nominal Capacity:	850mAh (100 Ohm Cont. to 2.0V @ 20°C)
Nominal Voltage:	3.0 V	Operating Temp. Range:	-20°C to 60°C
Maximum Off-Load Voltage:	3.7 V	Storage Temp. Range	-20°C to 45°C
Approximate Weight:	11 g	Terminals:	Cap and Recessed Base
Environmental:	No mercury added formulation meets Environmental Protection (EPA) requirements for landfill disposal.		

Typical Service @ 20°C:

Application:	Load	Load Unit	Duty Cycle	Daily Cycle	EPV	ANSI Min. Ave. Duration	Typical
Rating:	100	Ohms		24 h	2.0	25 Hours	32 Hours

