




Rayovac Stock Number: **941**  
Name: **941 GENERAL PURPOSE CARBON ZINC**

## Specifications

**Chemistry:** Carbon Zinc  
**Designation:** ANSI – 908, IEC 4R25X  
**Nominal Voltage:** 6.0 Volts  
**Approximate Weight:** 1Lb 4 Oz (0.58 Kg)  
**Approximate Volume:** 32 CU IN (524.4 CC)  
**Operating Temp:** -30°C to 55°C (-20°F to 130°F)  
**Shelf Life:** 3 years at 21°C  
**Terminals:** Spring  
**Case material:** Plastic  
**Environmental:** No mercury added formulation. Meets Environmental Protection Agency (EPA) requirements for landfill disposal.  
[Rayovac Material Safety Sheets](#)

## ANSI / IEC Standard Dimensions

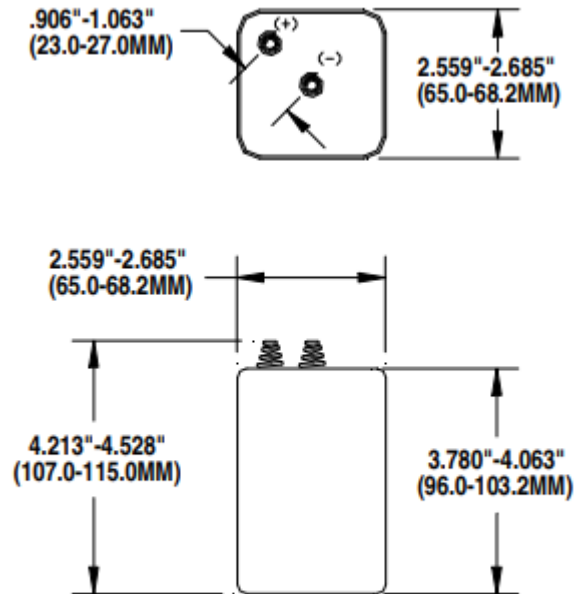

Dimensions shown are ANSI / IEC standards

## Typical Service Life – ANSI Application Tests

Application and Duty Cycle	Discharge Load	Service
Portable Lighting 30 min/day	9.1 Ω	9.0 hrs.
Portable Lighting 30 min/day	33 Ω	42.0 hrs.
Barricade Lighting 12 hr./day	110 Ω	160 hrs.
Release (Lot) 24 hr./day	9.1 Ω	8.0 hrs.

## Discharge Curves

