




Rayovac Stock Number: **R14S, 4230**

Name: **4230, C CARBON ZINC**

## Specifications

<b>Cell Chemistry:</b>	Carbon Zinc
<b>Designation:</b>	ANSI/NEDA – 14D (C), IEC – R14
<b>Nominal Voltage:</b>	1.5 volts
<b>Approximate Weight:</b>	1.63 Oz (46.2 grams)
<b>Approximate Volume:</b>	1.6 CU IN (26.2 CU CM)
<b>Operating Temp. Range:</b>	-18° C to 55° C (0° F to 130° F)
<b>Shelf Life:</b>	3 years at 21°C
<b>Terminals:</b>	Cap and Base
<b>Shell:</b>	Metal
<b>Environmental:</b>	No mercury added formulation Meets Environmental Protection Agency (EPA Requirements for landfill disposal. <a href="#">Rayovac Material Safety Sheets</a>

## ANSI / IEC Standard Dimensions

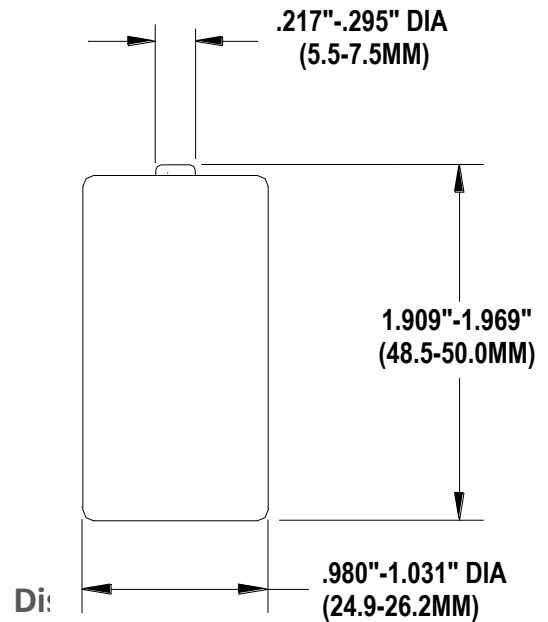

## TYPICAL INITIAL SERVICE AT 70°F (HOURS)

Application and Duty Cycle	Discharge Load	Service
<b>Lighting/Hift</b> 4 min/15 min, 8 hrs./day	3.9 Ω	7.5 hrs.
<b>Toy/Game</b> 1 hr./day	3.9 Ω	8.3 hrs.
<b>Release</b> 24 hrs./day	3.9 Ω	5.5 hrs.
<b>Portable Radio</b> 4hrs./day	20 Ω	42 hrs.

